

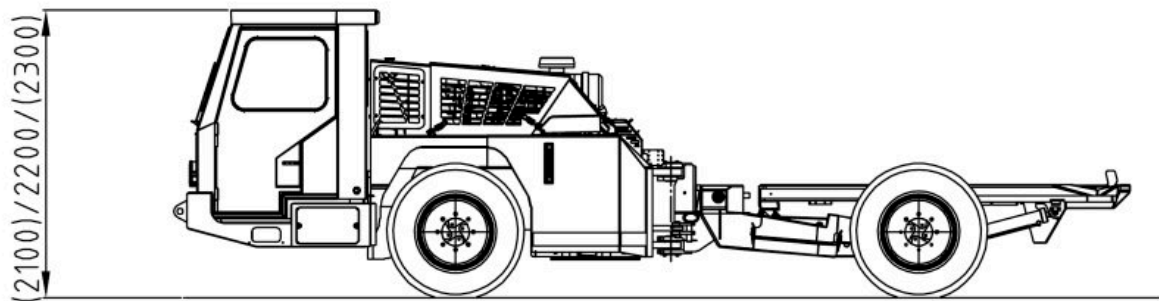
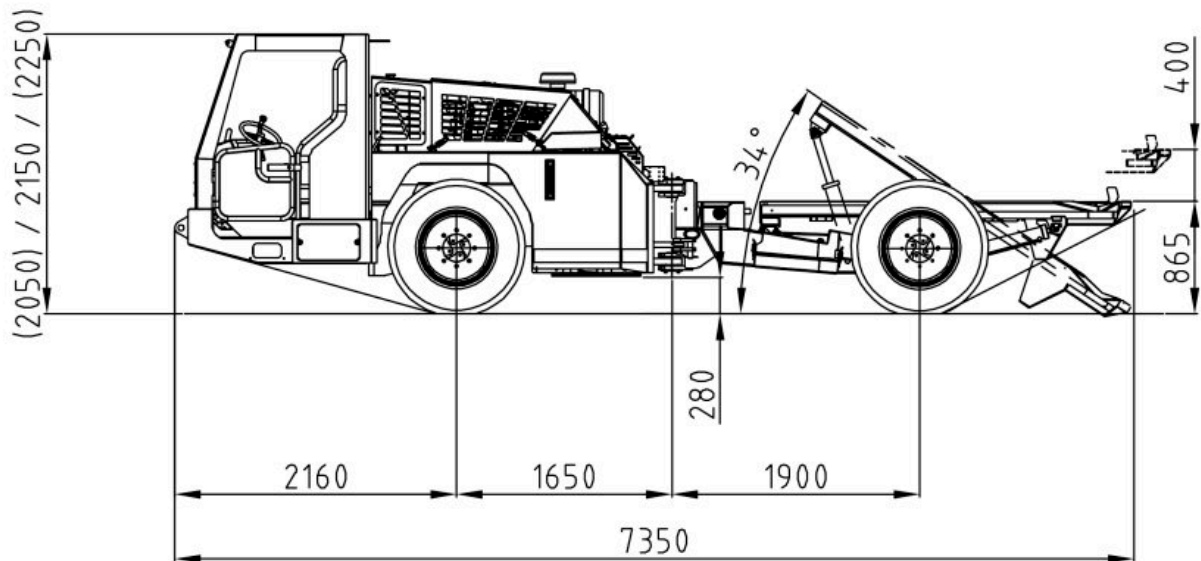


normet Normet Corporation Ahmolantie 6 FI-74510 IISALMI, FINLAND Tel +358 (0) 17 83 241 Fax +358 (0) 17 823 606	Multimec 6600	TI 1800021
		DRW DATE 21.11.2007 PAGE 1 / 3 APPR. 14.12.2008

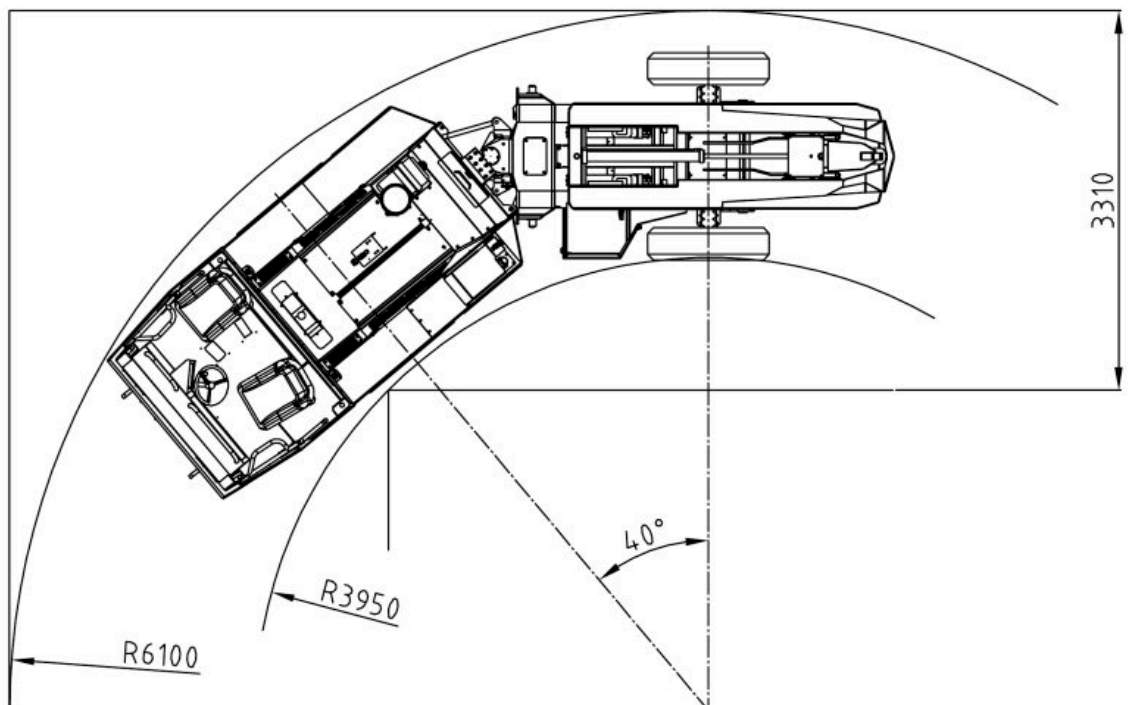

normet Normet Corporation Ahmolan tie 6 FI-74510 IISALMI, FINLAND Tel +358 (0) 17 83 241 Fax +358 (0) 17 823 606	Multimec 6600	TI 1800021
		DRW DATE 21.11.2007 PAGE 2 / 3 APPR. 14.12.2008

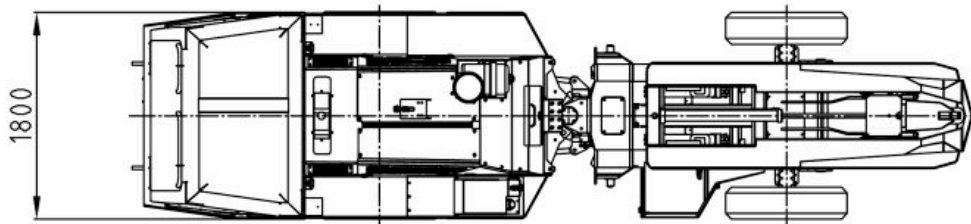

normet Normet Corporation Ahmolantie 6 FI-74510 IISALMI, FINLAND Tel +358 (0) 17 83 241 Fax +358 (0) 17 823 606	Multimec 6600	TI	1800021
		DRW	
		DATE	21.11.2007
		PAGE	3 / 3
		APPR.	14.12.2008

DIMENSIONS

Length	7350 mm
Width	1800 mm
Height	(+/- 100 mm) 2150 mm
Wheel base	3550 mm
Track	1500 mm
Ground clearance	280 mm

WEIGHT

Operating	7400 kg
Max. payload	6000 kg

TURNING RADIUS

Outer	6100 mm
Inner	3950 mm

PERFORMANCE CURVE

	4800031
1st gear	max. 5 km/h
2nd gear	12 km/h
3rd gear	25 km/h
Max. tractive effort	90 kN

TRANSMISSION

Dana Spicer powershift
 3 speeds forwards and reverse
 4-wheel drive

AXLES

Planetary type
 rear axle fixed
 front axle oscillation +/- 10°

TYRES

10.00 - 20 PR 16

BRAKES

Service brake: hydraulically powered two-circuit oil immersed multidisc brakes in both axles

Safety/Parking brake: hydraulically released fail-safe - type brake

STEERING

Hydraulic frame steering,
 Orbitrol type
 Frame articulation +/- 40°

HYDRAULICS

190 bar, 95 l/min/2200 rpm
 for steering and brakes
 200 bar, 105 l/min/2200 rpm for mixer

ENGINE

Deutz TCD 2012 L4
 96 kW/2200 rpm

ELECTRICAL SYSTEM

24 V negative ground
 Battery 2 x 110 Ah
 Alternator 80 A
 Lights (2+2) x 70 W

OPTIONS AND ACCESSORIES:**ENCLOSED CABIN****CABIN HEATING****AIR CONDITIONING****ENGINE**

MB 904 LA
 90 kW/2200 rpm

HYDRAULICS FOR MIXER CASSETTE