

Specifications




Prosser 9-55134-04 Submersible 2-Stage Dewatering Pump Specifications

- BODY CONSTRUCTION: 6063T6 Aluminum, Hard Anodized
- HORSEPOWER: 5.0 HP
- VOLTAGE: 460 V
- PHASE: 3 Ph
- HERTZ: 60 Hz
- RPM: 3450 RPM
- FULL LOAD AMPS: 7.6
- DISCHARGE PIPE SIZE: 2.0" NPT Female Discharge
- CORD LENGTH: 50'
- CORD TYPE: SOW / CORD SIZE: 12/4
- MOTOR: NEMA Design B - Three Phase
- CONTROL BOX: Three Phase, Watertight, NEMA 4
- MAX HEAD: 175'
- MAX FLOW RATE: 180 GPM



TOTAL METERS | HEAD FEET

Series 9-55000 Performance Curve

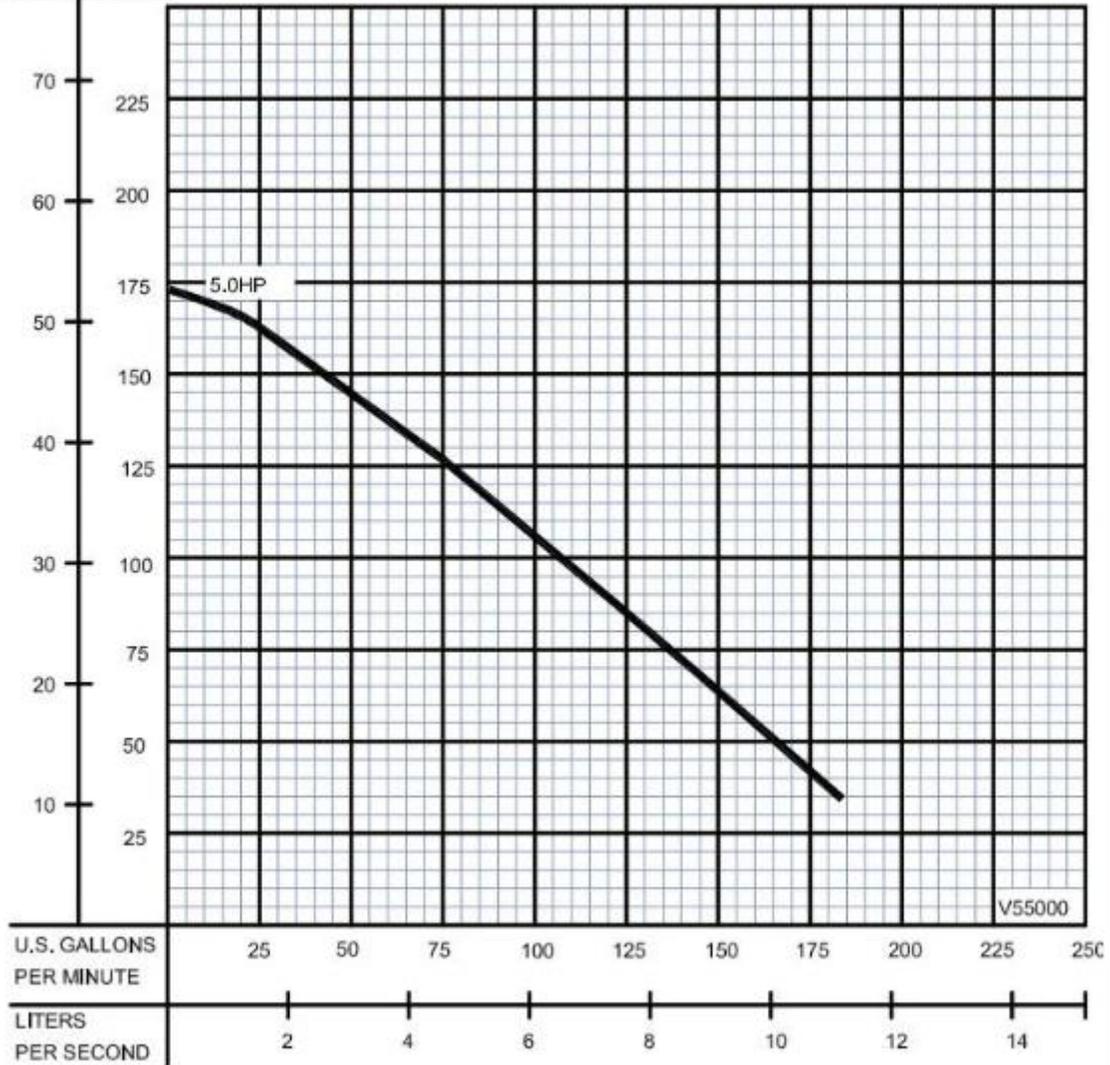

Testing is performed with water, specific gravity 1.0 @ 68° F @ (20°C), other fluids may vary performance