



MINIMATIC 205-40
Spec. no: 6-3100-A
1998-06-05
2/4

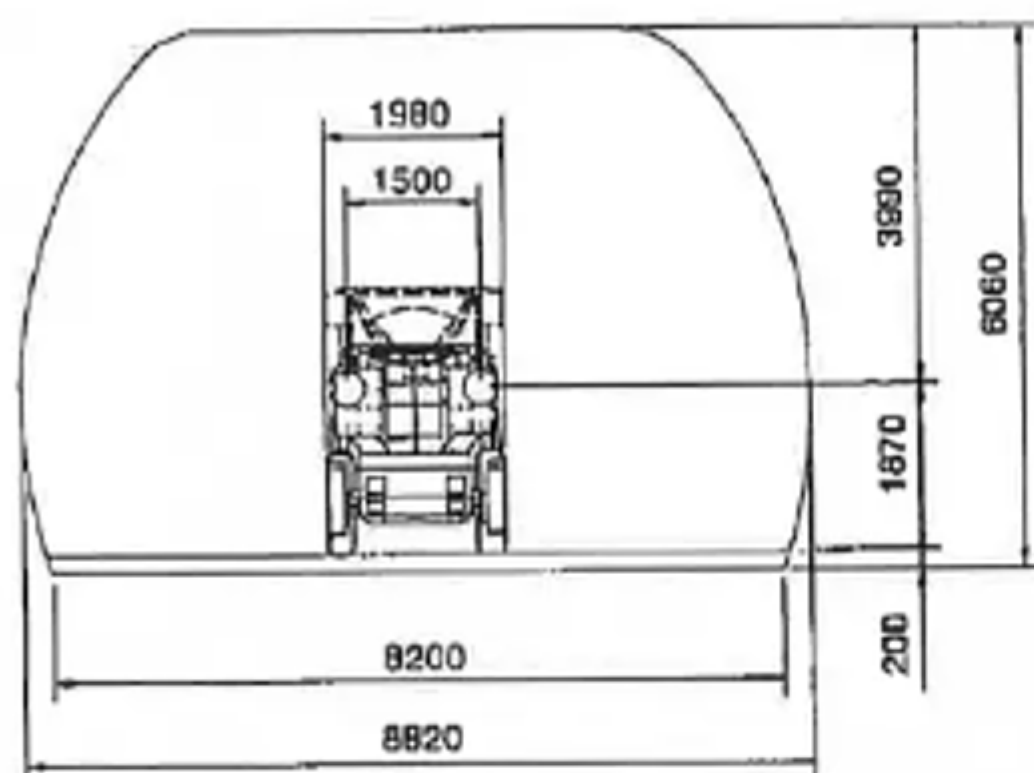

Parallel coverage (0° lookout angle)

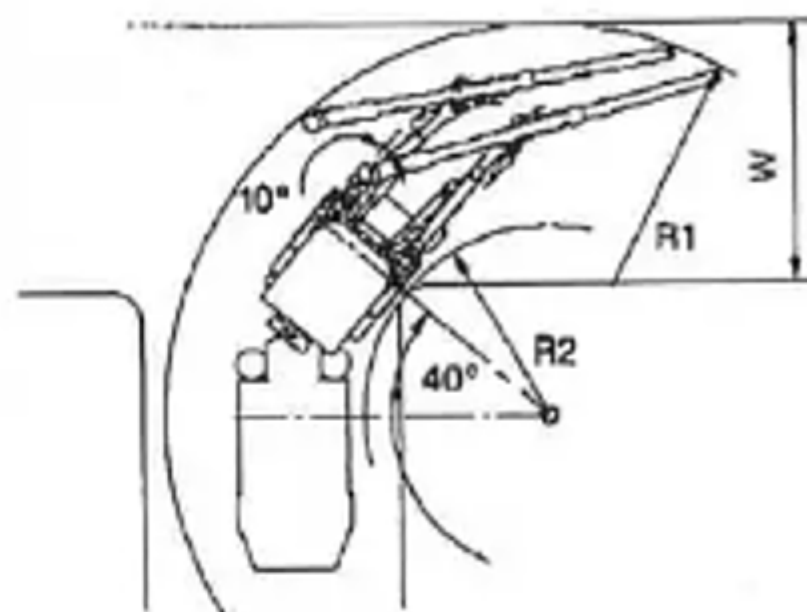

FEED TF500-X	R1	R2	W
10'	6200	3200	4050
12'	6300	3200	4150
14'	6450	3200	4250
16'	6600	3200	4400

Main weights, dimensions and performance

Length with CF 145x12	12 815 mm
Width	1980 mm
Height, min	2350 mm
max	3200 mm
Weight	19000 kg
Tramming speed	
horizontal	10 km/h
14 % = 1:7 = 8 degrees	4 km/h
Gradeability	28 % = 1:3,5 = 15°
Noise level	
operator platform	105 dB(A)
	ISO 6394-1985
emitted noise level	103 dB(A)
	ISO/DIS 11201-1993

HL 500 S rock drill

Weight	130 kg
Length	1000 mm
Profile height	76 mm
Power class	16 kW
Max. working pressure	
– Percussion	175 bar
– Rotation	175 bar
Max. torque	400 Nm
Hole size	45 – 57 mm
Recommended steel	R36-H35-R32
	R36-H32-R32
Shank adapter	7804-7531-01
Flushing water pressure	10 – 20 bar