

# Self-Propelled Articulating Booms

## Z-45/25 & Z-45/25J DC/Bi-Energy

### Specifications

Models	Z-45/25 DC & Bi		Z-45/25J DC & Bi	
Measurements	US	Metric	US	Metric
Working height maximum*	51 ft 6 in	15.87 m	51 ft 9 in	15.94 m
Platform height maximum	45 ft 6 in	13.87 m	45 ft 9 in	13.94 m
Horizontal reach maximum	25 ft 23 ft 1	7.62 m	25 ft 1 in 2	7.65 m
Up and over clearance maximum	ft 6 ft 7 in	7.04 m	ft 6 in 6 ft 6	7.04 m
▲ Platform length	18 ft 3 in 5	1.83 m	ft 7 in 22 ft	1.83 m
▲ Platform width	ft 10.3 in 6	2.00 m	5 in 5 ft	2.00 m
▲ Height - stowed	ft 8 in 9.5 in	5.56 m	10.3 in 6 ft	6.83 m
▲ Length - stowed		1.79 m	8 in 9.5 in	1.79 m
▲ Width		2.03 m		2.03 m
▲ Wheelbase		0.24 m		0.24 m
▲ Ground clearance - center				

### Productivity

Lift capacity	500 lbs	227 kg	500 lbs	227 kg
Platform rotation	180°		160°	
Vertical jib rotation	—		135°	
Turntable rotation	355° non-continuous		355° non-continuous	
Turntable tailswing	zero		zero	
Drive speed - stowed	3.0 mph	4.8 km/h	3.0 mph	4.8 km/h
Drive speed - raised**	0.61 mph	1.0 km/h	0.61 mph	1.0 km/h
Gradeability - stowed***	30%		30%	
Turning radius - inside	6 ft	1.83 m	6 ft	1.83 m
Turning radius - outside	14 ft	4.27 m	14 ft	4.27 m
Controls	24V DC proportional		24V DC proportional	
Tires	9 x 14.5 in		9 x 14.5 in	

### Power


Power source - DC	48V DC (eight 6 V batteries, 350 Ah capacity)			
Power source - Bi-Energy	48V DC (eight 6 V batteries, 350 Ah capacity) with 13.3hp (9.9kW) Kubota T4f Z482 diesel driven alternator			
Auxiliary power unit	24V DC		24V DC	
Hydraulic tank capacity	8 gal 9	30.3 L	8 gal 9	30.3 L
Fuel tank capacity- Bi-Energy	gal	34.1 L	gal	34.1 L

### Weight\*\*\*\*

DC	15,350 lbs	6,963 kg	16,300	7,394 kg
Bi-Energy	15,850 lbs	7,190 kg	16,800	7,620 kg


### Standards Compliance

ANSI A92.5, CSA B354.4, EN 280, AS 1418.10

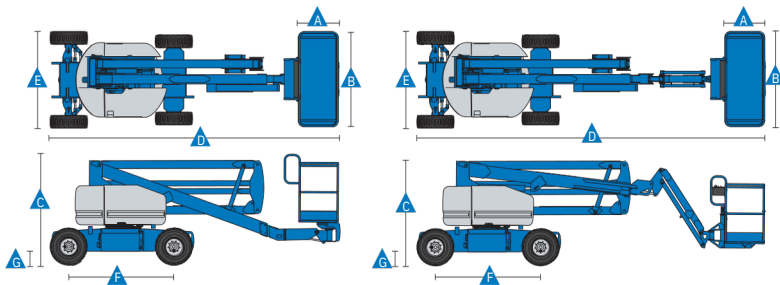


\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

### Range Of Motion Z-45/25

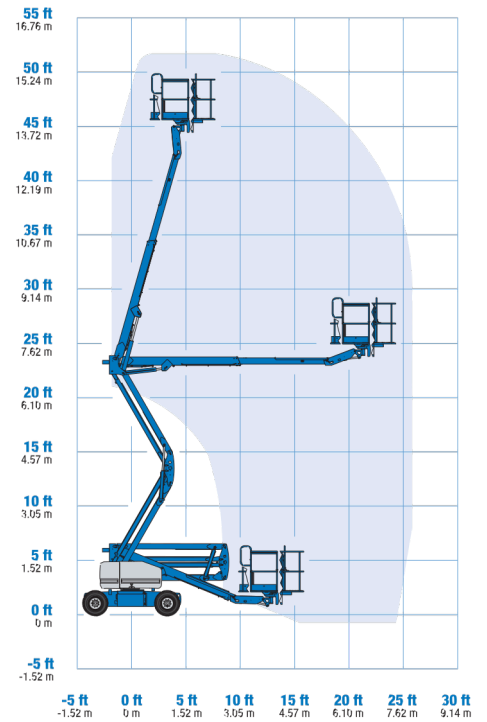

### Range Of Motion Z-45/25J

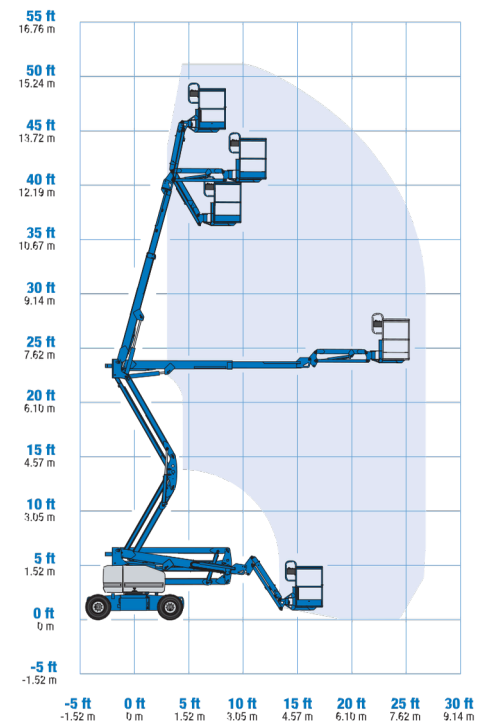

# Self-Propelled Articulating Booms

## Z-45/25 & Z-45/25J DC/Bi-Energy

### Features

#### Standard Features

##### Measurements

**Z-45/25** • 51 ft 6 in (15.87 m) working height  
 • 25 ft (7.62 m) horizontal reach • 23 ft 1 in (7.04 m) up and over clearance  
 • Up to 500 lbs (227 kg) lift capacity  
**Z-45/25J** • 51 ft 9 in (15.94 m) working height  
 • 25 ft 1 in (7.65 m) horizontal reach • 22 ft 1 in (6.73 m) up and over clearance  
 • Up to 500 lbs (227 kg) lift capacity

##### Productivity

- Self-leveling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Thumb rocker steer
- Drive enable
- AC power to platform
- Horn
- Hour meter
- Tilt alarm
- Zero tailswing
- 355° non-continuous turntable rotation

##### Power

- 48V deep cycle battery pack
- 24V DC auxiliary power
- 13.3hp (9.9kW) Kubota T4f Z482 diesel driven alternator. (Bi-energy model only)
- Battery charge indicator-BCI (Bi-energy model only)
- Universal 30A battery smart charger

#### Easily Configured To Meet Your Needs

##### Platform Options

- Steel 6 ft (1.83 m) (standard)
- Steel 6 ft (1.83 m) tri-entry

##### Jib Options

- Non-jib
- Articulating 5 ft (1.52 m) jib boom

##### Power

- 48V DC (eight 6V 350 Ah batteries)

##### Drive

- 2WD

##### Tire Options

- Industrial foam-filled (standard)
- Industrial non-marking foam-filled



#### Options & Accessories

##### Productivity

- Platform swing gate
- Half-mesh platform inserts with swing gate
- Platform top auxiliary rail
- Air line to platform
- Biodegradable hydraulic oil
- Fire resistant hydraulic oil
- Aircraft protection package\*
- Pipe cradle (pair)
- Alarm package
- Panel cradle package\*\*
- Light package
- Lockable platform control box cover
- Tow package
- Operator Protective Structure

##### Power

- AGM batteries
- EE UL583 Fire Protection rating (DC only)
- Battery charge indicator-BCI (DC only)
- Low voltage interrupt with BCI
- Cold Weather Package (Bi-Energy only)
- 800 watt inverter (DC only)
- Diesel catalytic muffler (Bi-Energy only)

\* Reduces platform capacity to 440 lbs (only available on Jib models)

\*\* Requires tri-entry platform

#### Genie United States

18340 NE 76th Street  
 P.O. Box 97030  
 Redmond, Washington 98073-9730  
 Telephone +1 (425) 881-1800  
 Toll Free in USA/Canada +1 (800)-536-1800  
 Fax +1 (425) 883-3475