
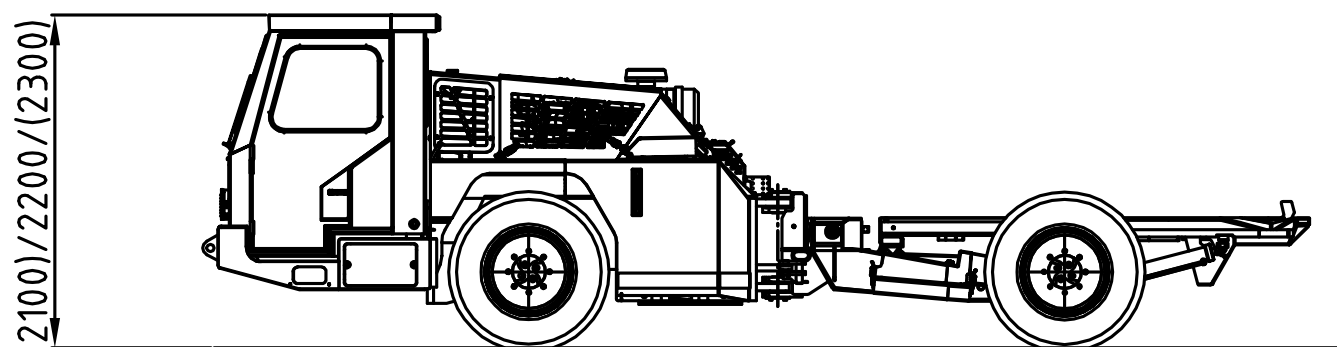


normet

Normet Oy
Ahmolan tie 6
FI-74510 IISALMI, FINLAND
Tel +358 (0) 17 83 241
Fax +358 (0) 17 823 606
info@normet.fi www.normet.fi

Multimec 6600

TI 1800021
DATE 02.07.2012
PAGE 1 / 4

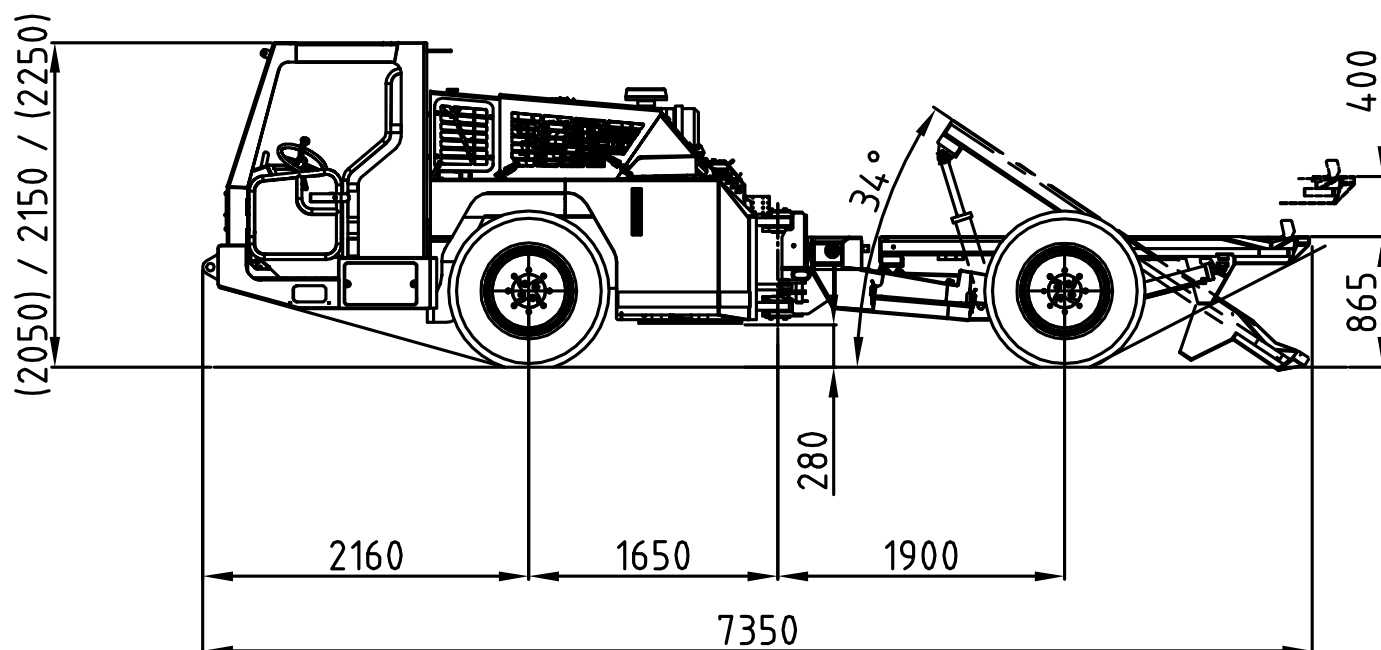

normet**Normet Oy**

Ahmolantie 6

FI-74510 IISALMI, FINLAND



Tel +358 (0) 17 83 241

Fax +358 (0) 17 823 606

info@normet.fi www.normet.fi

Multimec 6600

TI	1800021
DATE	02.07.2012
PAGE	2 / 4

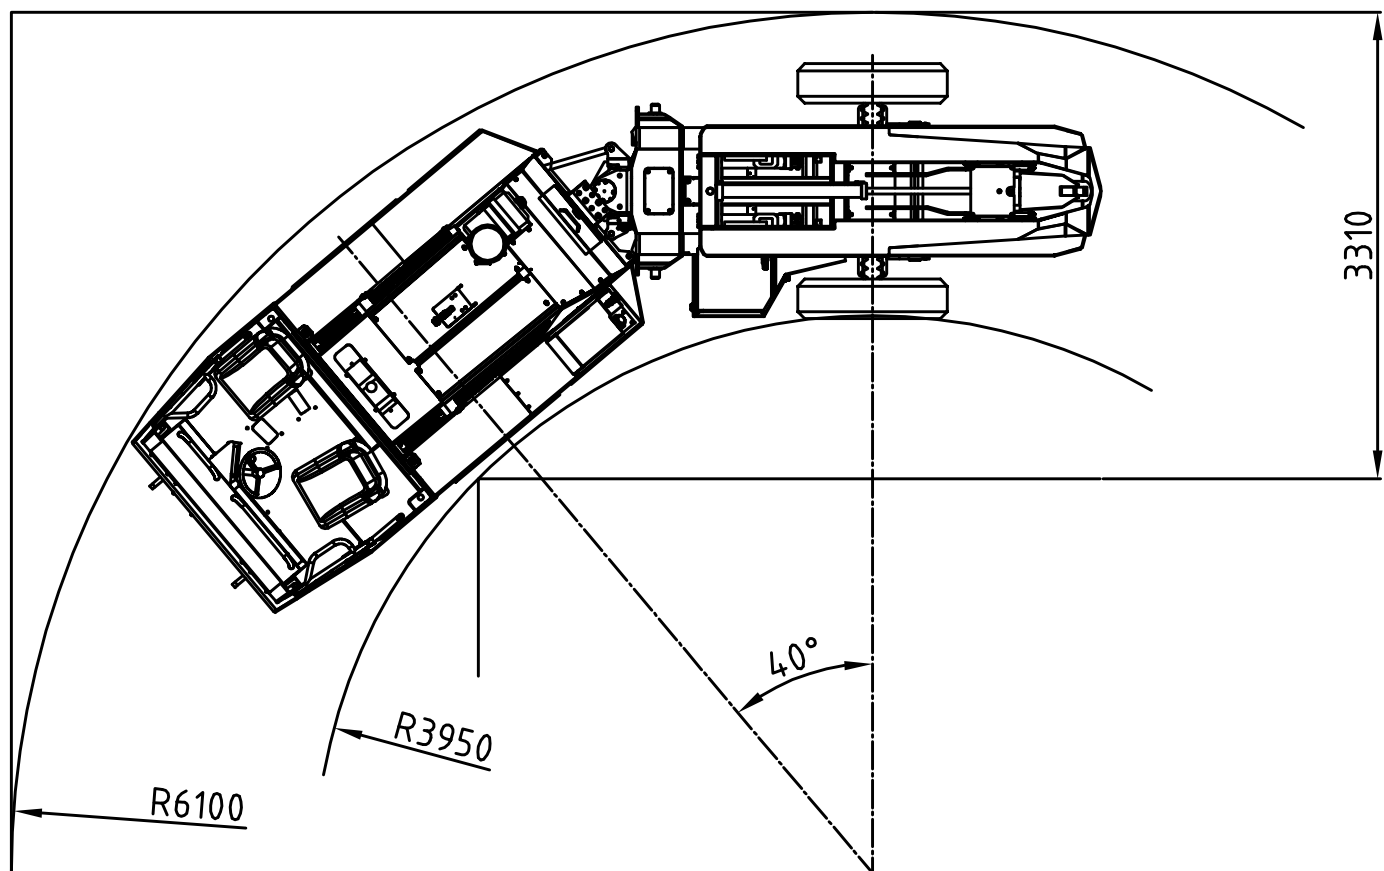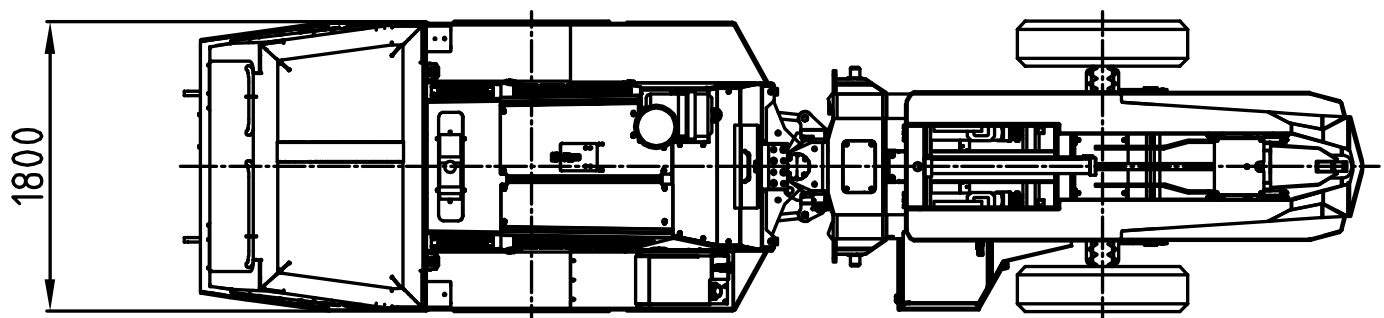

DIMENSIONS

Length	7350 mm
Width	1800 mm
Height	(+/- 100 mm) 2150 mm
Wheel base	3550 mm
Track	1500 mm
Ground clearance	280 mm

WEIGHT

Operating	7400 kg
Max. payload	6000 kg

TURNING RADIUS

Outer	6100 mm
Inner	3950 mm

PERFORMANCE CURVE

	4800031
1st gear	max. 5 km/h
2nd gear	12 km/h
3rd gear	25 km/h
Max. tractive effort	90 kN

TRANSMISSION

Dana Spicer powershift
3 speeds forwards and reverse
4-wheel drive

AXLES

Planetary type
rear axle fixed
front axle oscillation +/- 10°

TYRES

10.00 - 20 PR 16

BRAKES

Service brake: hydraulically powered two-circuit oil immersed multidisc brakes in both axles
Safety/Parking brake: hydraulically released fail-safe -type brake

STEERING

Hydraulic frame steering,
Orbitrol type
Frame articulation +/- 40°

HYDRAULICS

190 bar, 95 L/min/2200 rpm
for steering and brakes
200 bar, 95 L/min/2200 rpm for mixer

ENGINE

Deutz TCD 2012 L4
96 kW/2200 rpm

ELECTRICAL SYSTEM

24 V negative ground
Battery 2 x 110 Ah
Alternator 80 A
Lights (2 + 2) x 70 W

DRIVER'S CABIN

Open 2-man cabin FOPS/ROPS approved

OPTIONAL EQUIPMENT:

Enclosed cabin for NT60 (ROPS/FOPS)
Mercedes-Benz OM 904 LA 90 kW engine
Xenon working lights on cabin (2 + 2 pcs)
LED driving lights (4 + 2 pcs)
LED working lights on cabin (2 + 2 pcs)

ADDITIONAL EQUIPMENT:

CD/Radio system
Cabin heating
Air conditioning
Fogmaker extinguishing system (manual)
Fogmaker extinguishing system (automatic)
Ansul extinguishing system (manual)
Ansul extinguishing system (automatic)
Tempus manually actuated (Non CE)
Automatic lubrication system for carrier (Lincoln)
4m³/min hydraulic driven compressor on front rack
Fast fuel filling system Wiggins
1 extra hand held fire extinguisher (12 kg)
1 extra rotating beacon amber
1 extra rotating beacon red
1 extra rotating beacon blue
1 extra strobe light white
Tools for maintenance
Reversing camera
NT60 spare wheel
Hydraulics for mixer cassette
0,4 m³/min compressor for Fuel / Lube cassette
Text labels in:
Fin / Por / GB / Swe / Rus / Nor / Ger / Fra / Spa / Ita

CASSETTES:

Base cassette
C100 Material cassette
C162 Personnel cassette
C125 Crane cassette
C250 Fuel cassette
C200 Lube cassette
C300 Mixer cassette
C315 Scissor lift cassette
C100 Workshop cassette
C350 Lube cassette
C350 Water cassette
C350 Fuel Cassette
C600 Explosives cassette

LTC SERVICES**SPARE PARTS**

Spare parts package A: Available for 1000 h of use*.
Include periodical service, most common wearing parts
and most critical safety parts.

Spare parts package B: Available for 3000 h of use*.
Include periodical service, most common wearing parts
and most critical safety parts.

* Recommendations are based on average
hours - can vary a lot depending on work site
conditions.

TRAINING SERVICES

Available before delivery, at start up and after
delivery

Product training:

Operation and Maintenance
NorSmart
Foundation of electrics, hydraulics
and mechanics
Audit

Process training:

Concrete spraying
Charging
Process audit

AUDIT SERVICES

To improve performance of the machines
To improve the performance of your processes
To help improve the quality of maintenance operations

SERVICE CONTRACTS

Spare parts supply programmes
Scheduled inspection programmes
Supervision programmes
Periodic maintenance programmes
Machine usage programmes

LINK ONE

Link One electronic spare part manuals

WARRANTY SERVICES

Extended warranty

DEALER

McDowell 

2018 Kingsway Blvd.
Sudbury, Ontario, Canada P3B 4J8
Tel: +1 (705) 566-8190
www.bmcdowell.com
sales@bmcdowell.com